

Product Application Manual

PREPARE:

1. Wash the surface using a pH neutral shampoo to remove excess dirt.
2. Decontaminate the surface to remove any contaminants stuck to the surface.

CORRECTION:

Machine Polish the surface to remove any imperfections.


DEGREASE:

Remove polish residue using diluted Isopropyl Alcohol (IPA). Dilute the IPA in 30% water. For Example, in a 1L bottle add 300ml water and 700ml IPA.

SUITABLE FOR:

- ✓ Gelcoat
- ✓ Painted Metallic Surface
- ✓ Top Coat

PRODUCT APPLICATION INSTRUCTIONS:

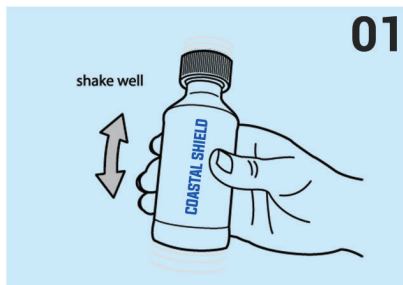

01


Gently shake the Coastal Shield Bottle before use.



02

Open the lid and apply generous amount of coating on the dry/new applicator pad.

💡 **TIP:** Put the lid back on the bottle after applying on the applicator pad to stop the product from curing inside the bottle.

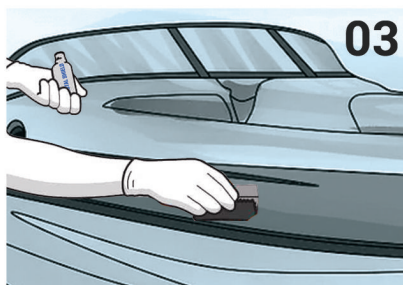

03


Work in cross-hatch pattern on small areas and make sure the coating is applied evenly.

💡 **TIP:** Apply the product generously on the applicator pad for even application. If there are streak marks on surface when applying add a few more drops on the pad and apply again.



04

Let the product dry for 30 seconds and remove excess residue using 380gsm microfiber cloths. We recommend using 2 microfiber cloths to remove residue (first to wipe off the bulk of residue and second to buff off any remaining residue). Inspect the surface thoroughly after wiping off to ensure you have not missed a spot.

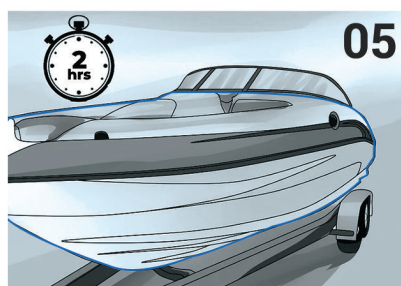

05

The coating is touch to dry within few hours however, we recommend the vessel to be stationary for 12 hours. Avoid manual washing for upto 7 days.

LAYERING:

1. 2 layers of Revive must be applied for 3-year warranty.
2. Wait 45 minutes between layers in summer and 60 minutes in winter.